

SN-NVR3704E1-P4

4CH 1HDD 4CH PoE 4K NVR



Key Features

- Up to 4-ch IP cameras access
- Up to 40 Mbps incoming/outgoing bandwidth
- Up to 1-ch @ 8MP/4-ch @ 1080P decoding capacity
- 1 SATA hard disk up to 8TB
- Plug & Play with 4 PoE interface
- Support 1 HDMI and 1 VGA interface, maximum resolution of HDMI is 4K






Specification

Video Input		
IP Camera Input	4 Channel	
Incoming Bandwidth	40 Mbps	
Outgoing Bandwidth	40 Mbps	
Video Output		
HDMI Output	3840 × 2160, 1920 × 1080, 1280 × 1024, 1024 × 768	
VGA Output	1920 × 1080, 1280 × 1024, 1024 × 768	
Decoding Capacity	1ch 8MP, 4ch 1080P	
Dual Stream	Support	
Multi-screen Display	1/4	
Recoding		
Resolution	8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc.	
Recording Mode	Manual, Schedule (Regular, Continuous), Event	
Trigger Events	Motion Detection, Video Loss, IVS	
Playback and Backup		
Sync Playback	4/1	
Search Mode	Time /Date, Alarm, Picture grid, Event	
Backup Mode	USB Device, Network	
Alarm		
General Alarm	Motion Detection, Video Loss	
Intelligent Analysis (By Camera)	Smoking Detection, Smoke and Fire Detection, Fire Spot Detection, Intrusion, Single Line Crossing, Double Line Crossing, Loitering, Wrong-way, Illegal Parking, People Counting, Smart motion detection, Enter Area, Leave Area, etc.	
Abnormal Alarm	Disk Alarm, IP Address Conflict, Network Disconnect	
Network		
Network Function	HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP, 3G/4G, PPPoE	
Remote Users	8 users	
P2P	Support	
Interoperability	ONVIF, SDK, CGI	
Storage		

ANR	Support	
Interface		
HDD Interface	1 SATA interfaces, up to 8TB capacity for each disk	
Network Interface	1 × RJ-45, 10/100 Mbps self-adaptive Ethernet port	
PoE Interface	4 ports, 10/100Mbps, 802.3af, max 24W	
HDMI	1	
VGA	1	
Audio In/Out	1ch audio output	
USB Interface	Front panel: 2 × USB 2.0, Rear panel: 1 × USB 2.0	
General		
Power Supply	48VDC/1.25A	
Power Consumption	< 15 W (without HDD)	
Operating Conditions	-10 °C to 50 °C (14 °F to 122 °F)	
Storage Conditions	Less than 90% RH	
Certifications	CE/FCC	
Dimensions	255 × 235.0 × 45.3 mm (10.04 × 9.25 × 1.78 inch)	
Net Weight	0.9 kg (1.98 lb) without HDD	

Dimensions (mm)

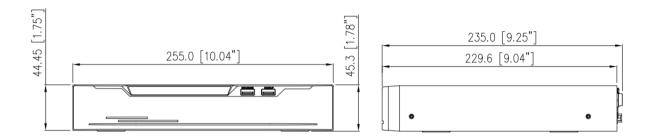

Rear Panel

