Product Information



SN-IPR8047AKAN-T

- 1/1.8" Sony STARVIS II CMOS 4 MP(2592×1520)@60 fps
- 4.1-12.8 mm, 8-32 mm, auto-iris
- ANPR, up to 120km/h
- Vehicle attributes recognition
- Interface: Alarm, Wiegand, RS485, Audio
- 12 VDC, PoE(IEEE 802.3af)



SN-IPR8045DQAN-T

- 1/2.8" Sony STARVIS sensor
- 4MP(2592×1520)@60fps
- 2.7-13.5 mm, 5-50mm
- ANPR, up to 60km/h
- Interface: Alarm, Audio
- 12 VDC, PoE(IEEE 802.3af)



SN-IPR8047HAN-FT

- 1/1.8" Sony STARVIS || CMOS
- 4 MP(2592×1520)@60 fps
- C/CS mount, fixed/DC iris
- ANPR, up to 120km/n
- Vehicle attributes recognition • Interface: Alarm, RS485, Audio, CVBS
- 12 VDC, PoE(IEEE 802.3af)



SN-IPS8681WDR-Z40

- 8 MP(3840×2160)@30 fps
- 40x, 6.8~272mm
- IR: 500m (1600 ft)
- Detection and Capture: Face, Human, Vehicle, Smoke & flame
- Intelligent Analysis: Smart Motion, Intrusion, Single Line Crossing, Double Line Crossing, Loitering, Wrong-way, Illegal Parking, People counting

SunView CMS



License Plate Recognition

Real-time view of the vehicle license plate snapshot pictures, relevant warehousing





License Plate Search

Retrieve historical data of license plate captures and support multiple search conditions



License Plate Library Management

Manage license plate grouping, license plate information, etc.




License Plate Comparison Strategy


Manage license plate comparison strategies and configure various linkage parameters



Add, delete and modify parking lot and parking lot parameter configuration

Accessories

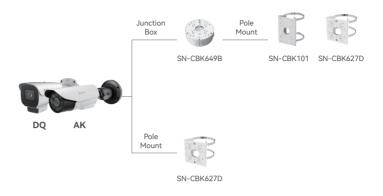

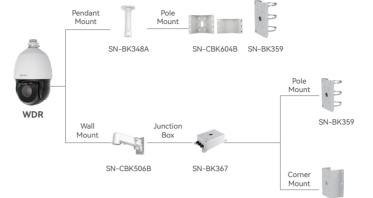

Application Scenarios



GUNELL







SN-BK358

Toll Station

Illegal Parking

Intelligent Traffic **System Solution**





The specifications and descriptions of products and services contained in this catalogue were correct at the time of publishing. Inner Range reserves the right to change specifications or withdraw products without notice.

22-23F, Building 2, Chongwen Park, Nanshan Zhiyuan (Phase 3), No. 3370 Liuxian Avenue, Nanshan District, Shenzhen 518052

Shenzhen Sunell Technology Corporation

www.sunellsecurity.com

2025.2

Key Features

The intelligent traffic monitoring system stands as a crucial element of modern urban management, seamlessly integrating advanced technologies like high-definition visual technology, artificial intelligence, and big data analysis. It meticulously captures and interprets traffic information in real-time, empowering administrative departments to make precise decisions and facilitate efficient control. This system not only vastly enhances the effectiveness and accuracy of traffic governance but also infuses technological prowess into urban security, safeguarding public safety and expediting the transition towards smarter cities.

Edge Intelligence



Onboard ANPR



Attributes Recognition



1000 Black/White List

Flexible Application



Stand-alone

- Onboard ANPR algorithm
- Linkage barrier gate
- Black/White List: 1000
- LPR Smart Search



- Urban roadside
- Highway
- Parking lot
- Entrance & Exit



Third-party Integration

- CGI
- Wiegand, I/O, RS485

High Performance & High Image Quality



4MP, 2688×1520@60Fps





• 1 lane: up to 120km/h 2 lane: up to 100km/h



Coverage

• Up to 2 lanes



IR illumination, No light pollution

Accuracy

- Capture rate ≥99%,
- Recognition accuracy ≥98%

Parking Lot Management



Solution

Flexible Installation

- Installation height: 1–3m • Capture distance: 2-6m
- Detection speed: <30km/h

Black/White List

management

Solution Topology

LED Screen

• supports pole mount, wall mount, ceiling mount

• Supports white list, black list, visitor

• Support for list event linkage

Barrier Control

- Onboard ANPR algorithm
- Up to 99% Accuracy
- Wiegand or I/O linkage barrier gate





Parking Information Display

- CMS software to view parking information



• Displayed on the entrance and exit LED screen

Road Monitoring

SN-IPR8047AKAN-ST-PZ8-3 SN-IPS8681WDR-Z40

Solution

Illegal Parking



Attributes Recognition

Wrong-way Driving



Smoke & Flame

High Speed Capture

Pedestrian Presence

Solution Topology



