


Accessories

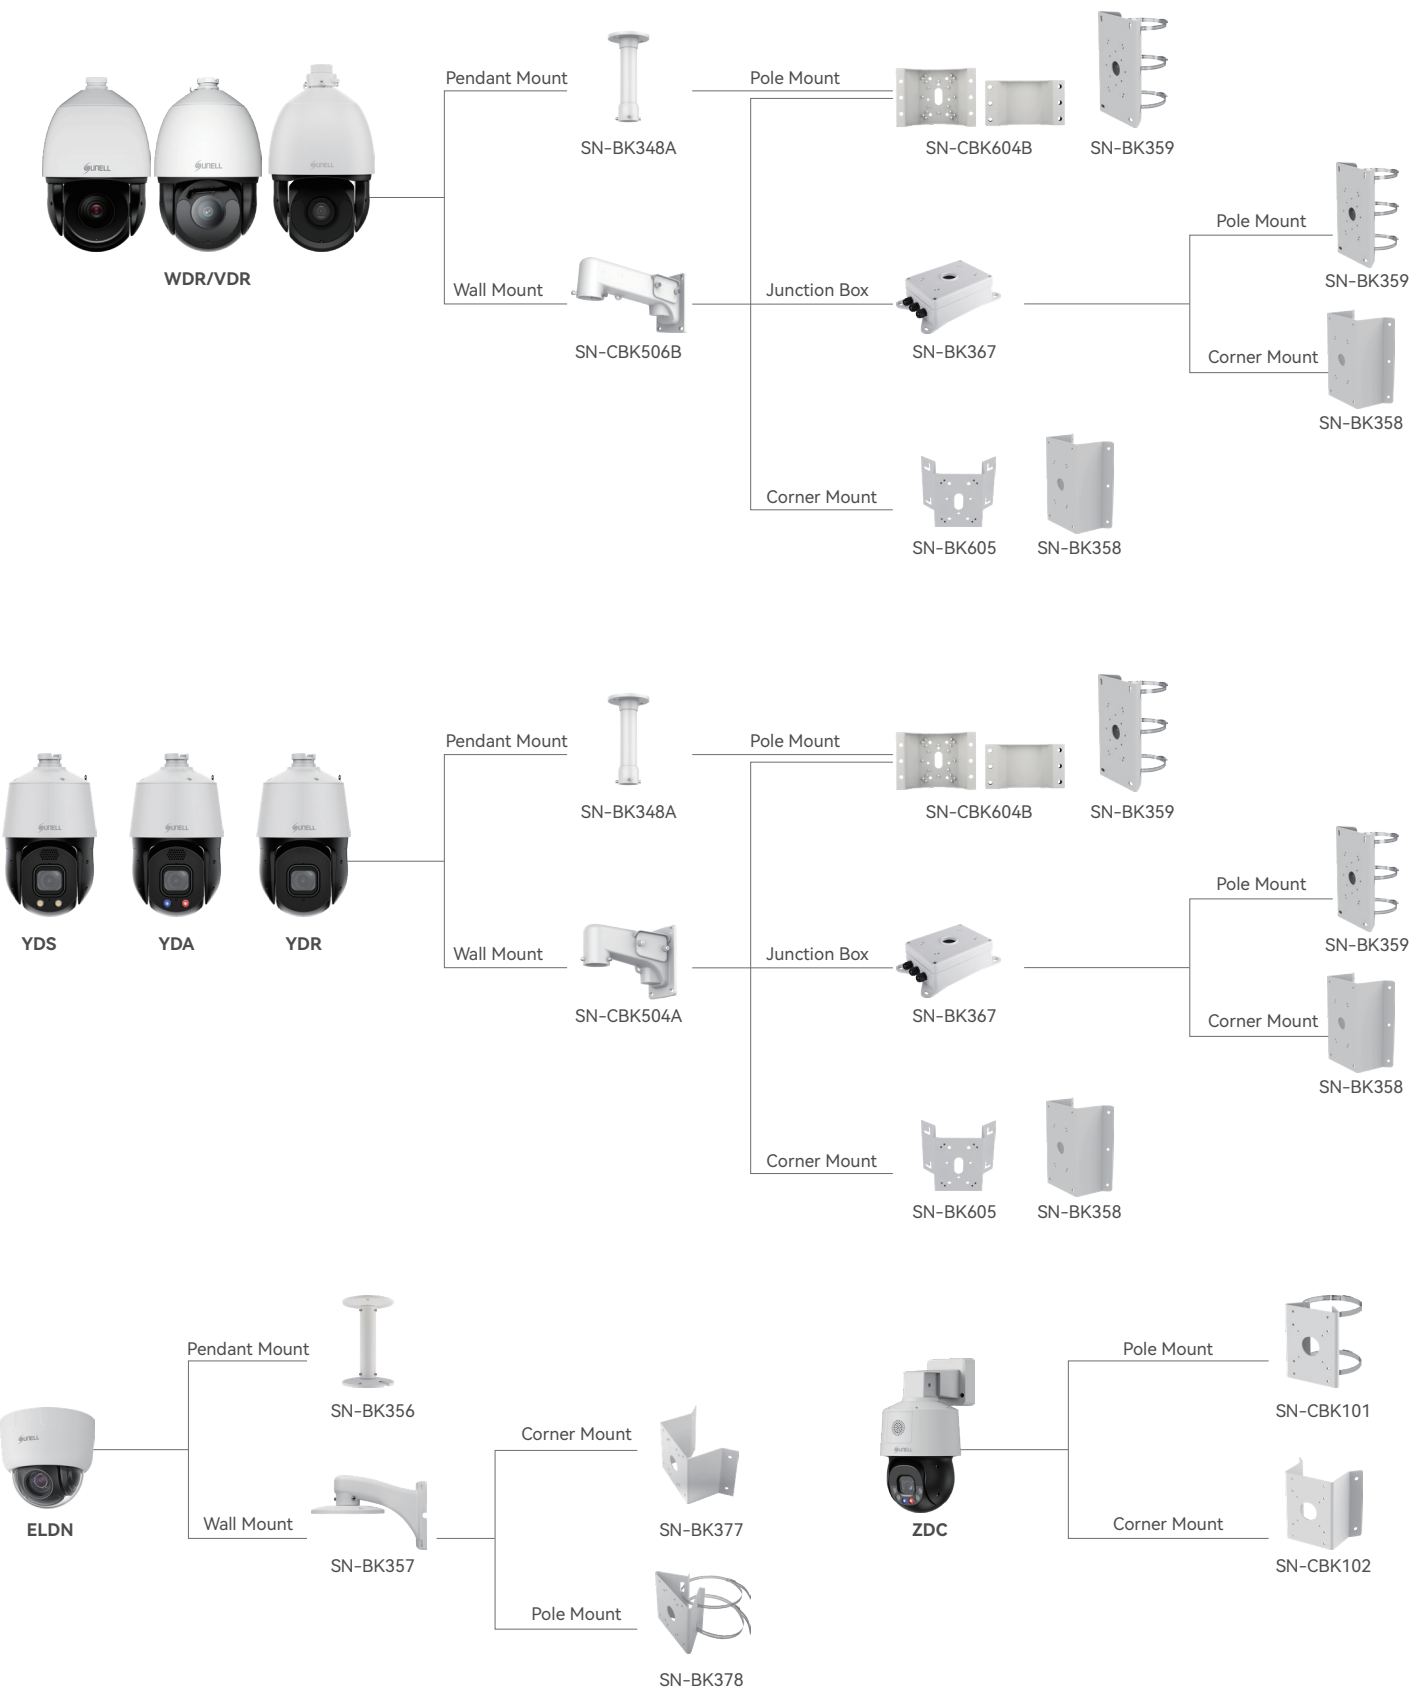

Shenzhen Sunell Technology Corporation

22-23F, Building 2, Chongwen Park, Nanshan Zhiyuan (Phase 3), No. 3370 Liuxian Avenue, Nanshan District, Shenzhen 518052

+86(755) 2675 4336 +86(755) 8602 6152 sales@sunellsecurity.com

©2025 Shenzhen Sunell Technology Corporation. All rights reserved.

The specifications and descriptions of products and services contained in this catalogue were correct at the time of publishing. Inner Range reserves the right to change specifications or withdraw products without notice.




Network Speed Dome Cameras




Key Features

Deep Learning Algorithms

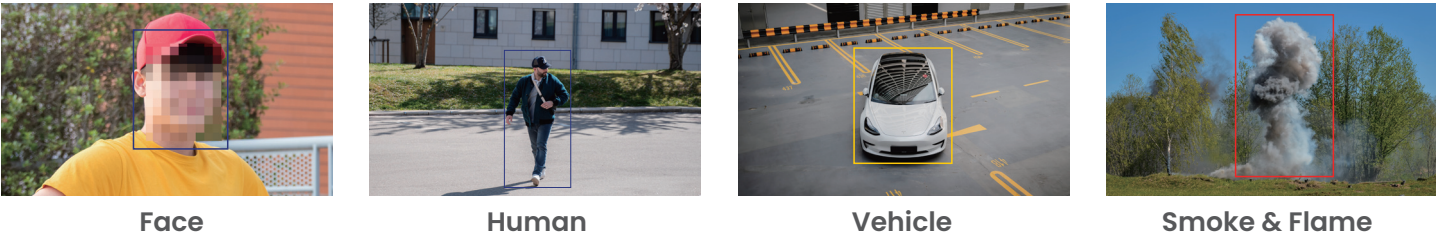

Intelligent Tracking

- Human/Vehicle
- Auto Tracking

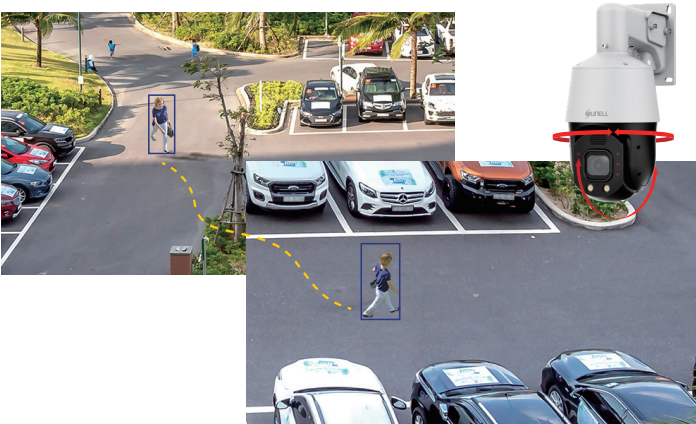

Sound and Light Alarm

- Speaker coverage 100m
- Sound and Light Alarm
- Two-way Audio




Multi-sensor

- Panoramic & Detail In One View



Optical Defog

- 40X, 1/2.8", 5MP, 5 to 200 mm
- 30X, 1/1.8", 4MP, 7 to 210 mm

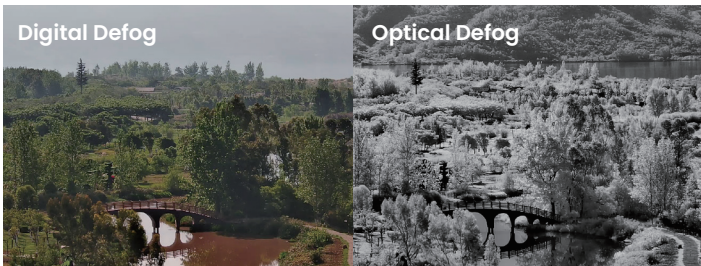

Products

Dual-lens			
	SN-IPS8655PDS-Z30		
	Pano view • 4MP(2592×1520)@25/30fps • 1/1.8" Sony CMOS • 2.8mm or 4mm • F1.0 • 30m warm light	Close-up view • 5MP(2592×1944)@25/30fps • 1/2.8" Sony CMOS • 30X, 5.3 to 159mm • 150mIR, 50m warm light	
Smart Dual Light			
 8MB 30X 5"	SN-IPS8681YDS-Z30 • 8MP(3840×2160)@25/30fps • 1/1.8" Sony CMOS • 30X, 7 to 210 mm • 250m IR, 60m warm light • Optical defog • Sound and light alarm	 4MB 30X 5"	SN-IPS8641YDS-Z30 • 4MP (2592×1520)@25/30fps • 1/1.8" Sony CMOS • 30X, 7 to 210mm • 250m IR, 60m warm light • Optical defog • Sound and light alarm
 5MB 30X 5"	SN-IPS8655YDS-Z30 • 5MP(2592×1944)@25/30fps • 1/2.8" Sony CMOS • 30X, 5.3 to 159mm • 150mIR, 50m warm light • Optical defog • Sound and light alarm	 5MB 5X 3"	SN-IPS8654ZDC-Z5 • 5MP (2880×1620)@25/30fps • 5X, 2.7 to 13.5mm • 50m IR, 30m warm light • Sound and light alarm • Pan Range: 0° to 355°, Tilt Range: -20° to 90° • 12 VDC, PoE+ (IEEE 802.3at)
Laser			
 5MB 40X 7"	SN-IPS8653WDL-Z40 SN-IPS8653VDL-Z40 • 5MP(2592×1944)@25/30fps • 1/2.8" Sony CMOS • 40X, 5 to 200mm • 600m laser	 5MB 30X 7"	SN-IPS8655WDL-Z30 SN-IPS8655VDL-Z30 • 5MP(2592×1944)@25/30fps • 1/2.8" Sony CMOS • 30X, 5.3 to 159mm • 400m laser
 4MB 40X 7"	SN-IPS8641WDL-Z37 • 4 MP(2592×1520)@25/30 fps • 1/1.8" Sony CMOS • 37X, 6.8 to 251mm • 600m laser	 4MB 15X 4"	SN-IPS8652ELDN-Z15 • 5MP(2592×1944)@25/30fps • 1/2.8" Sony CMOS • 15X, 5.3 to 79.5mm • SD card slot, up to 256GB • 12 VDC, PoE (IEEE 802.3af)

Products

Starlight IR			
 4K 40X 7"	SN-IPS8681WDR-Z40 SN-IPS8681VDR-Z40 • 8 MP(3840×2160)@25/30fps • 1/1.8" Sony CMOS • 40X, 6.8 to 272mm • IR: 500m (1600ft)	 4MB 40X 60 FPS 7"	SN-IPS8646WDR-Z40 SN-IPS8646VDR-Z40 • 4 MP(2592×1520)@50/60 fps • 1/1.8" Sony CMOS • 40X, 6.8 to 272mm • IR: 400m
 4MB 37X 7"	SN-IPS8641WDR-Z37 SN-IPS8641VDR-Z37 • 4 MP(2592×1520)@25/30 fps • 1/1.8" Sony CMOS • 37X, 6.8 to 251mm • 400m IR	 5MB 30X 7"	SN-IPS8653WDR-Z40 SN-IPS8653VDR-Z40 SN-IPS8643WDR-Z40 SN-IPS8643VDR-Z40 • 5MP(2592×1520)@25/30fps • 1/2.8" Sony CMOS • 40X, 5 to 200mm • 300m IR
 5(4)MP 30X 7"	SN-IPS8655WDR-Z30 SN-IPS8655VDR-Z30 SN-IPS8645WDR-Z30 SN-IPS8645VDR-Z30 • 5MP(2592×1944)@25/30fps • 1/2.8" Sony CMOS • 30X, 5.3 to 159mm • 200m IR	 5(4)MP 30X 5"	SN-IPS8655YDR-Z30 SN-IPS8645YDR-Z30 • 5MP(2592×1944)@25/30fps • 1/2.8" Sony CMOS • 30X, 5.3 to 159mm • 200m IR
 5(4)MP 18X 5"	SN-IPS8655YDR-Z18 SN-IPS8645YDR-Z18 • 5MP(2592×1944)@25/30fps • 1/2.8" Sony CMOS • 18X, 5.3 to 95.4 mm • 150m IR	 2MB 25X 5"	SN-IPS8622YDR-Z25 • 2 MP(1920×1080)@25/30fps • 1/2.8" Sony CMOS • 25X, 5 to 125 mm • 200m IR