



Accessories

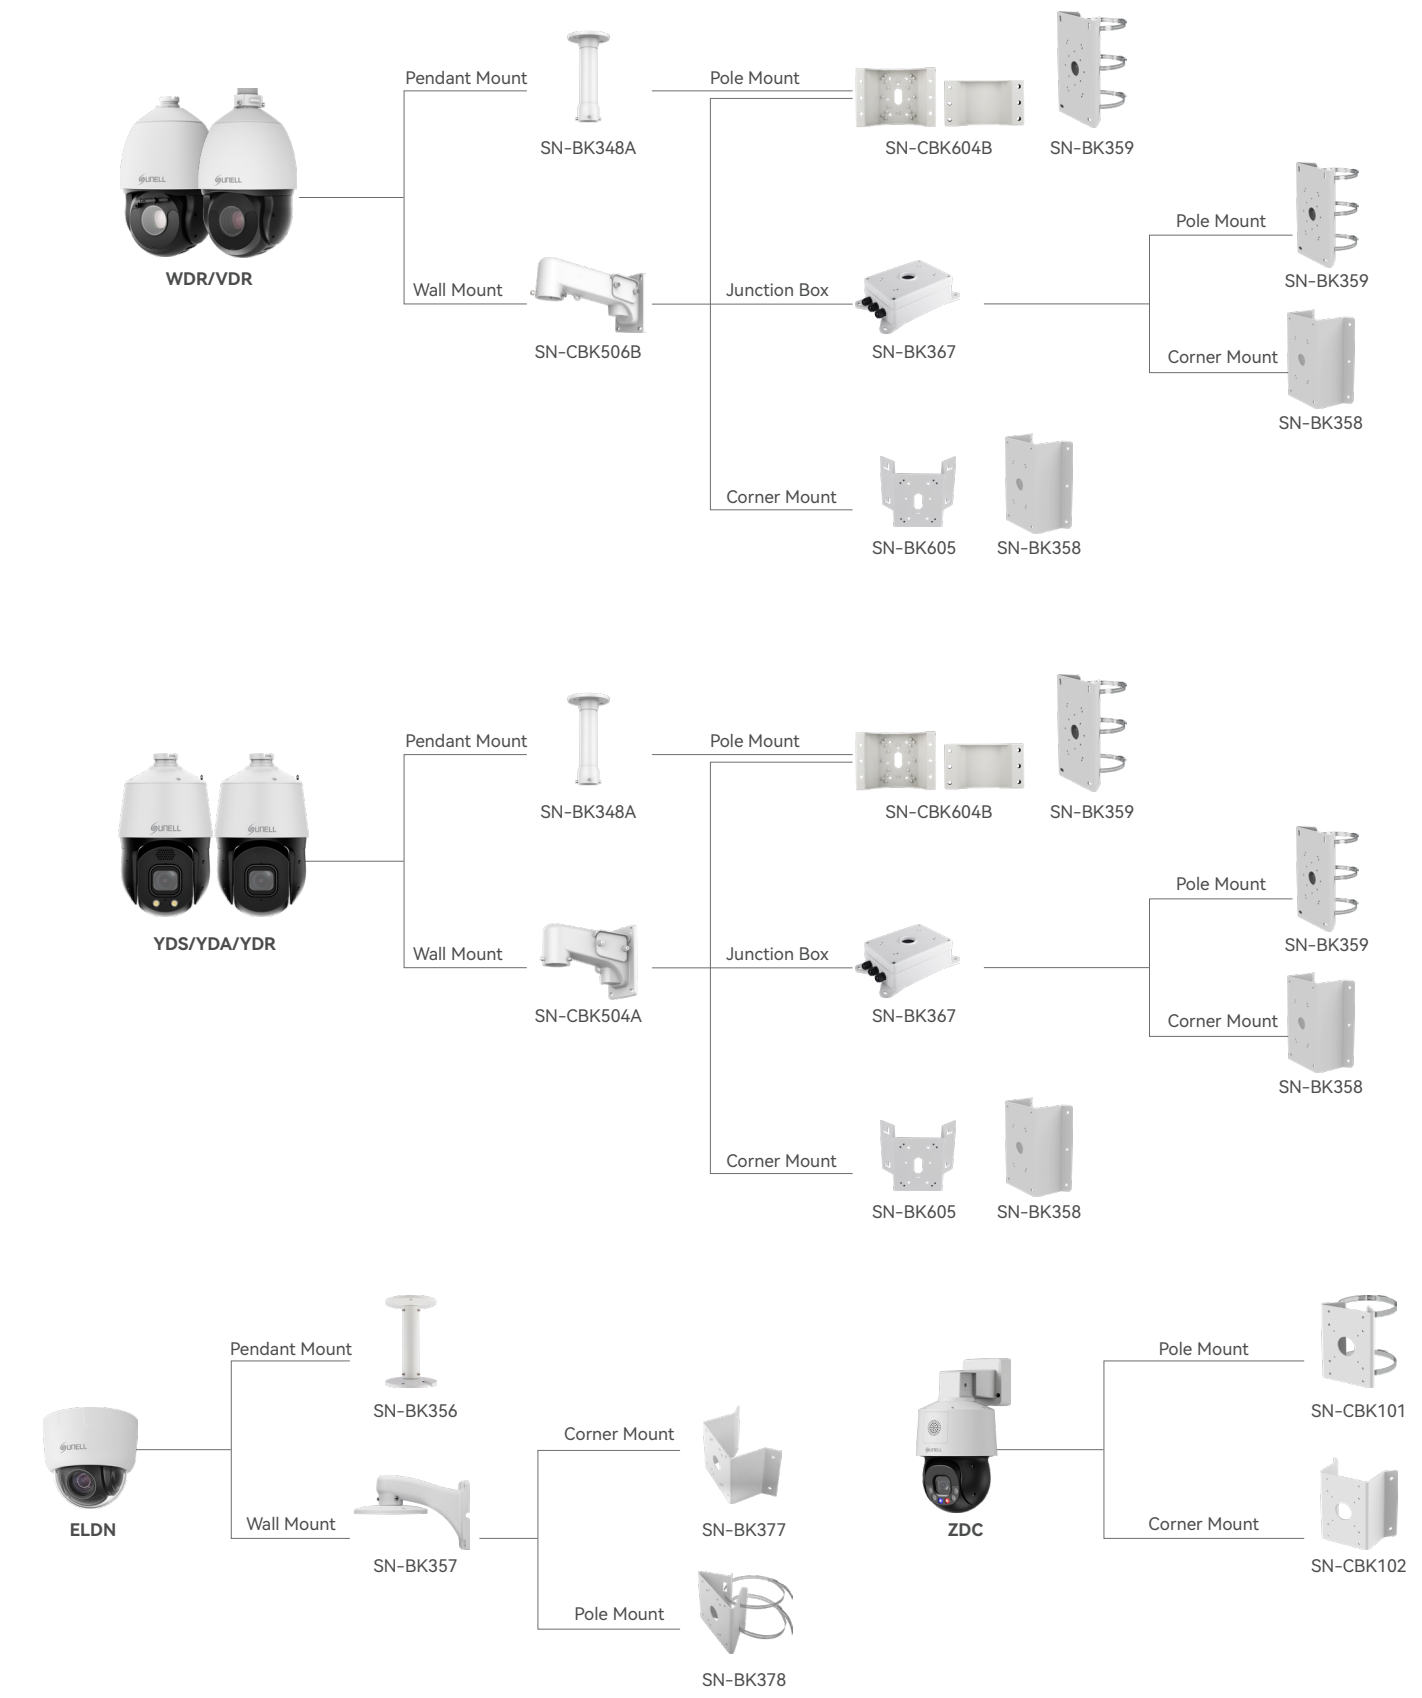

Accessories

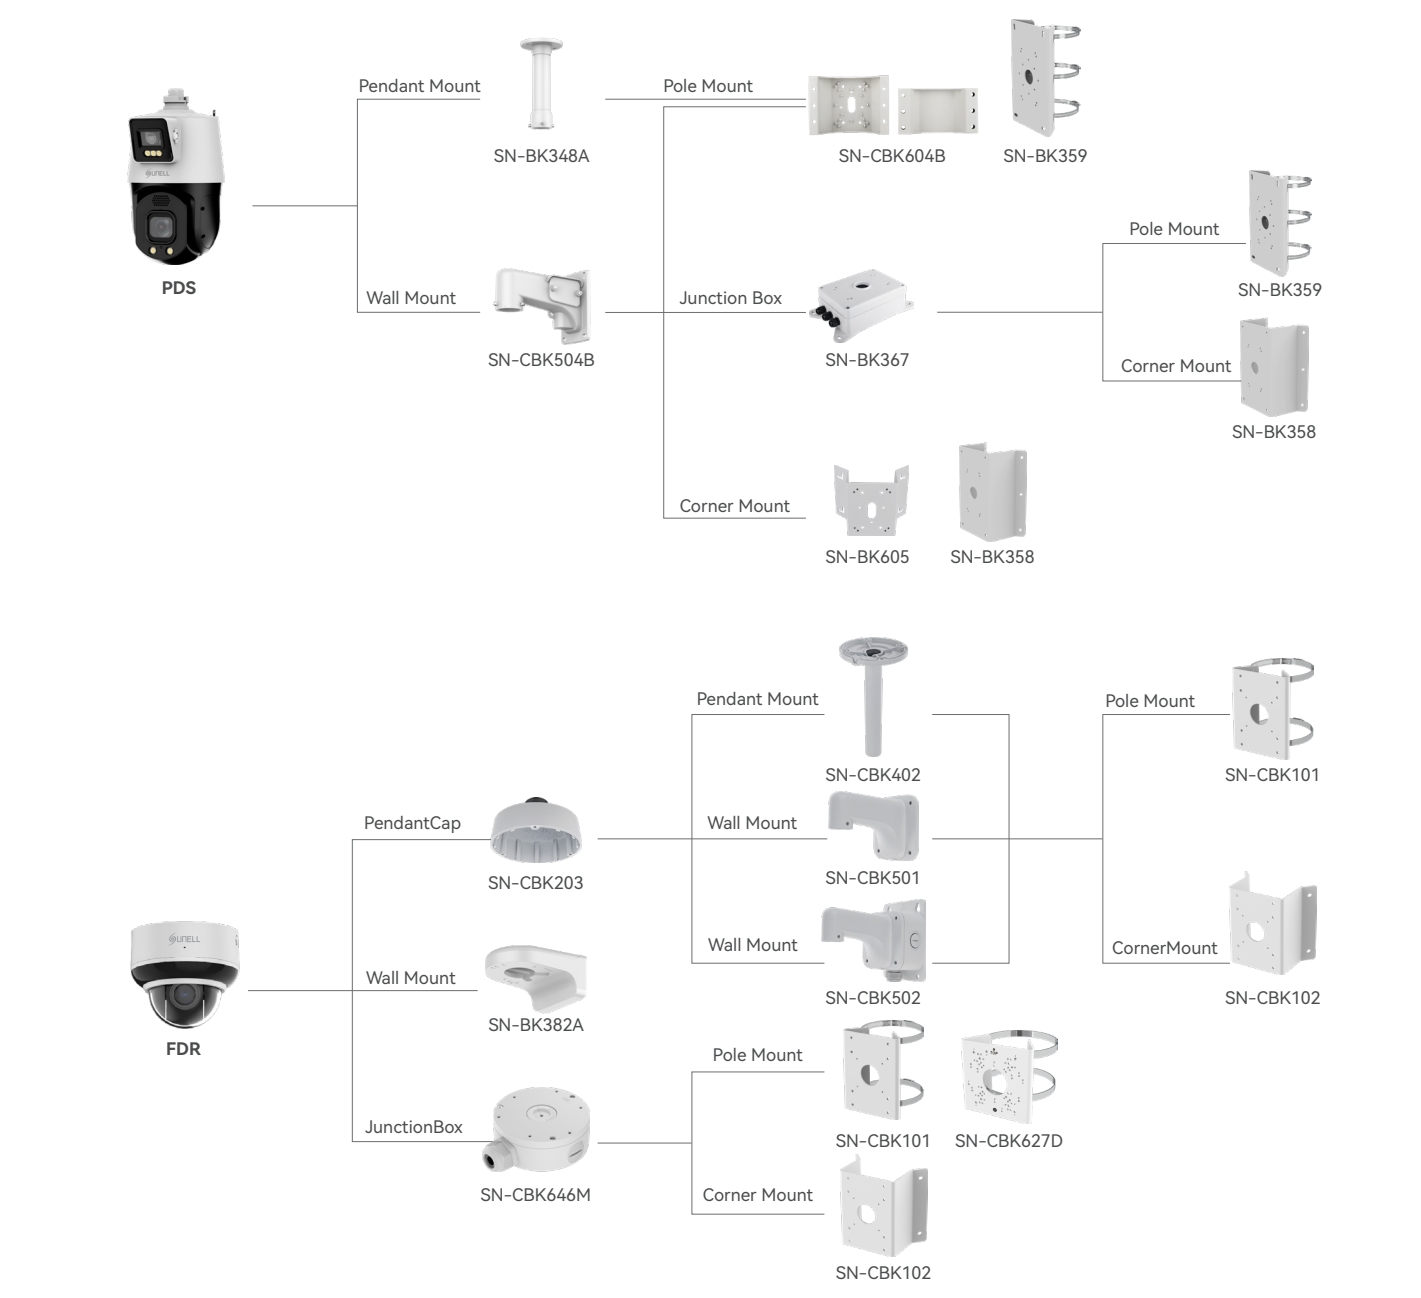

Shenzhen Sunell Technology Corporation

22-23F, Building 2, Chongwen Park, Nanshan Zhiyuan (Phase 3), No. 3370 Liuxian Avenue, Nanshan District, Shenzhen 518052

+86(755) 2675 4336 +86(755) 8602 6152 sales@sunellsecurity.com

©2025 Shenzhen Sunell Technology Corporation. All rights reserved.
The specifications and descriptions of products and services contained in this catalogue were correct at the time of publishing. Sunell reserves the right to change specifications or withdraw products without notice.

2025.8



Network Speed Dome Cameras



www.sunellsecurity.com

Edge AI

Attributes

- Age
- Gender
- Eyewear
- Headwear
- Upper Garment
- Lower Garment
- Bag
- Color

- Type
- Color

Fire Prevention

Smoke & Flame

Intelligent Analysis

SMD
(smart motion)

Intrusion

Single Line Crossing

Double Line Crossing

Loitering

People counting

Wrong-way

Illegal Parking

Running

Fall

Fight

Sound and Light Alarm

- Speaker coverage 100m
- Sound and Light Alarm
- Two-way Audio




Multi-sensor

- Panoramic & Detail In One View



Optical Defog

- SN-IPS8681YDS-Z30
- SN-IPS8641YDS-Z30

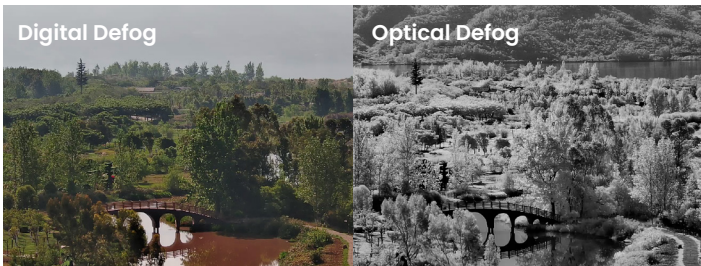

Products

MultiView		2" 5x PTZ	
 4+5 MB30X5"	SN-IPS8655PDS-Z30 Static Channel • 4MP(2592×1520)@25/30fps • 1/1.8" Sony CMOS • 2.8mm, F1.0 Static Channel • 5MP(2592×1944)@25/30fps • 1/2.8" Sony CMOS, 30X • 200m IR, 60m Warm Light	 5MB5X2"	SN-IPS8656FDR-Z5 • 5MP(2592×1944)@25/30fps • 1/2.7" CMOS • 5X, 2.7 to 13.5mm • 30m IR
Smart Dual Light			
 8MB30X5"	SN-IPS8681YDS-Z30 • 8MP(3840×2160)@25/30fps • 1/1.8" Sony CMOS • 30X, 7 to 210 mm • 250m IR, 60m warm light • Optical defog • Sound and light alarm	 4MB30X5"	SN-IPS8641YDS-Z30 • 4MP (2592×1520)@25/30fps • 1/1.8" Sony CMOS • 30X, 7 to 210mm • 250m IR, 60m warm light • Optical defog • Sound and light alarm
 5MB30X5"	SN-IPS8655YDS-Z30 • 5MP(2592×1944)@25/30fps • 1/2.8" Sony CMOS • 30X, 5.3 to 159mm • 150m IR, 50m warm light • Optical defog • Sound and light alarm	 5MB5X3"	SN-IPS8654ZDC-Z5 • 5MP (2880×1620)@25/30fps • 5X, 2.7 to 13.5mm • 50m IR, 30m warm light • Sound and light alarm • Pan Range: 0° to 355°, Tilt Range: -20° to 90° • 12 VDC, PoE+ (IEEE 802.3at)
Laser			
 5MB40X7"	SN-IPS8653WDL-Z40 SN-IPS8653VDL-Z40 • 5MP(2592×1944)@25/30fps • 1/2.8" Sony CMOS • 40X, 5 to 200mm • 600m laser	 5MB30X7"	SN-IPS8655WDL-Z30 SN-IPS8655VDL-Z30 • 5MP(2592×1944)@25/30fps • 1/2.8" Sony CMOS • 30X, 5.3 to 159mm • 400m laser
Laser		4" 15x PTZ	
 4MB40X7"	SN-IPS8641WDL-Z37 • 4 MP(2592×1520)@25/30 fps • 1/1.8" Sony CMOS • 37X, 6.8 to 251mm • 600m laser	 4MB15X4"	SN-IPS8652ELDN-Z15 • 5MP(2592×1944)@25/30fps • 1/2.8" Sony CMOS • 15X, 5.3 to 79.5mm • SD card slot, up to 256GB • 12 VDC, PoE (IEEE 802.3af)

Products

Starlight IR			
 8MB40X7"	SN-IPS8681WDR-Z40 SN-IPS8681VDR-Z40 • 8 MP(3840×2160)@25/30fps • 1/1.8" Sony CMOS • 40X, 6.8 to 272mm • IR: 500m IR	 4MB40X60 FPS7"	SN-IPS8646WDR-Z40 SN-IPS8646VDR-Z40 • 4 MP(2592×1520)@50/60 fps • 1/1.8" Sony CMOS • 40X, 6.8 to 272mm • IR: 400m IR
 4MB37X7"	SN-IPS8641WDR-Z37 SN-IPS8641VDR-Z37 • 4 MP(2592×1520)@25/30 fps • 1/1.8" Sony CMOS • 37X, 6.8 to 251mm • 400m IR	 5(4)MP40X7"	SN-IPS8653WDR-Z40 SN-IPS8653VDR-Z40 • 5MP(4MP)@25/30fps • 1/2.8" Sony CMOS • 40X, 5 to 200mm • 300m IR
 5(4)MP30X7"	SN-IPS8655WDR-Z30 SN-IPS8655VDR-Z30 • 5MP(4MP)@25/30fps • 1/2.8" Sony CMOS • 30X, 5.3 to 159mm • 200m IR	 5(4)MP30X5"	SN-IPS8655YDR-Z30 SN-IPS8645YDR-Z30 • 5MP(4MP)@25/30fps • 1/2.8" Sony CMOS • 30X, 5.3 to 159mm • 200m IR
 5(4)MP18X5"	SN-IPS8655YDR-Z18 SN-IPS8645YDR-Z18 • 5MP(4MP)@25/30fps • 1/2.8" Sony CMOS • 18X, 5.3 to 95.4 mm • 150m IR	 2MB25X5"	SN-IPS8622YDR-Z25 • 2 MP(1920×1080)@25/30fps • 1/2.8" Sony CMOS • 25X, 5 to 125 mm • 200m IR