



SN-E1322BH-R-EZ

2MP Hybrid HD Analogue Varifocal Turret Camera



Key Features

- 1/2.8" Progressive Scan CMOS
- 2.8 ~ 12 mm motorized lens
- Max 30fps@1080P
- Video transmission 300m
- IR distance up to 35m
- 3D DNR, WDR, ICR, GLOBE, ATW
- Support AHD/TVI/CVI/CVBS Output
- IP66




Specification

Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Signal System	PAL/NTSC
Electronic Shutter	Auto, PAL: 1/25 ~ 1/10000s, NTSC: 1/30 ~ 1/10000s
Min. illumination	Color: 0.001 Lux @ (F1.2, AGC ON), B/W: 0 Lux with IR on
S/N Ratio	More than 50dB
OSD Joystick	Support
Up the Coax	Support
Angle Adjustment	Pan: 0° ~ 360°, Tilt: 0° ~ 90°, Rotation: 0° ~ 360°
Lens	
Lens Type	Varifocal lens, motorized focus
Iris	Fixed Iris
Focal Length	2.8 ~ 12 mm
Max. Aperture	F1.6
Field of View (FoV)	H: 94.9° ~ 37.1°, V: 50.2° ~ 20.8°
Illuminator	
Illuminator Type	IR
Illuminator Number	24pcs
Illumination Distance	Up to 35 m (114.8 ft)
IR wavelength	850 nm
Video	
Resolution	1080P (1920×1080)
Frame Rate	PAL: 25fps ,NTSC: 30fps
Video Output	Support AHD/TVI/CVI/CVBS Output
Day/Night	Auto / Color / B&W / EXT
OSD Menu	Support
Wide Dynamic Range	WDR, EXT/OPEN/CLOSE
Gain Control	Auto

Noise Reduction	3D DNR, AUTO/MANUAL (0-30)
White Balance	Auto
BLC	Support
General	
Power Supply	12 VDC ±10%
Power Consumption	Max. 4.5 W (12V DC, IR ON)
Operating Temperature	-10 °C to 55 °C (14°F to 131 °F)
Operating Humidity	Less than 85% RH
Ingress Protection	IP66
Certifications	CE-EMC: - EN 61000-6-3, EN 61000-3-2, EN 61000-3-3, EN 50130-4 FCC 47 CFR Part 15 Subpart B
Material	Aluminum alloy
Dimensions	Φ120.1 × 95.9 mm (Φ4.73 × 3.78 inch)
Net Weight	0.8 kg (1.76 lb)

Dimensions (mm)

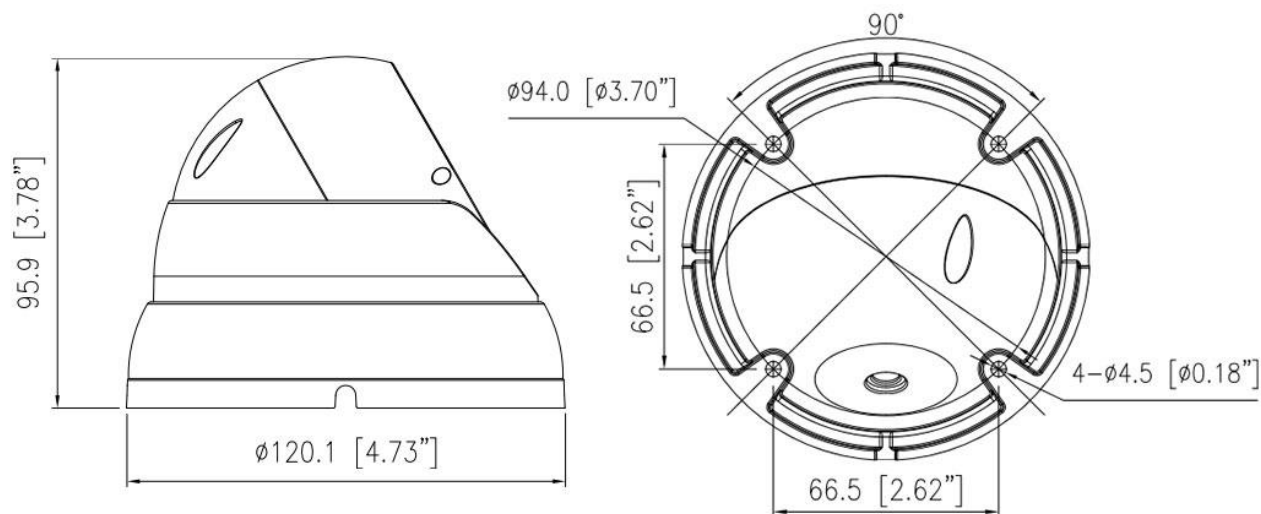

Accessories

Optional:



Junction Box
SN-BK361



Pendant Cap
SN-CBK201A



SN-CBK402
Ceiling Mount



SN-CBK501
Wall Mount



SN-CBK502
Wall Mount



SN-CBK101
Pole Mount



SN-CBK102
Corner Mount