
SN-IPPVM32-B

32-inch Public View Monitor

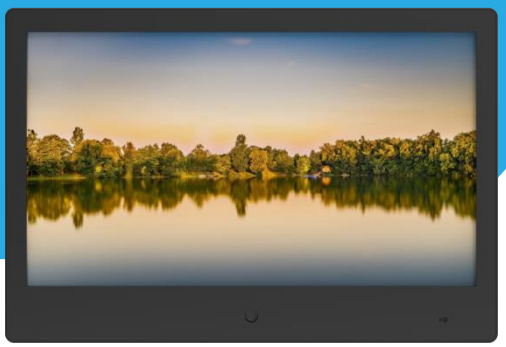

Key Features

- Built-in HD(1080P) Camera, High-quality image display
- Image mode: Support uploading images and videos for playback
- Support DVR storage (up to 1TB TF card)
- IP camera video output, H.264/H.265 encoding type selection output
- Web upload ads for playback
- Support Chrome, Firefox, Edge browser playback
- Linux operating system, more stable and cost-effective
- Support POE and DC input, Wide power supply design, 12V±10% input


Specification

Panel	
Screen diagonal dimension	31.5-inch
Led Type	LED
Screen Maximum Resolution	1920 × 1080
Color Depth	16.7 Million colors
Brightness	250 cd/m^2
Monitor Aspect Ratio	16:9
Contrast Ratio	1200:1
Response Time	8ms
View Angle H/V(degrees)	H: 178°, V: 178°
Monitor Board	
Interface	Micro USB + TF + LAN + DC + Alarm Input / output + face alarm output + mobile detection alarm output + Emergency mode input
Speakers	8 Ω 3 Watt/channel
DC/PoE	DC: 12V±10% PoE: 38 to 56V
OSD Languages	English, Chinese, Japanese
Power- Watts(on and standby)	< 55W
Wired communication	RJ45 × 1 10M/100M
Wireless communication	WIFI
IPC Camera	
Sensor	1/2.9”, 2MP CMOS
Encoding format	H.264 / H.265
Effective Pixels	1920 × 1080
Browser	Support for Chrome, Firefox and Edge
Lens	3.3mm Fixed Lens
Integration protocol	ONVIF Profile S, API
Recording Resolution	1920 × 1080@30FPS
Motion Detection	Support
DVR Storage	up to 1TB TF card

©2025 Sunell all rights reserved. Design and specifications are subject to change without notice.

EMMC/Flash	8GB
DDR/RAM	1GB
Function	
Image settings	Chroma, contrast, brightness, sharpness, saturation Wide dynamics, backlight compensation, strong light suppression, 3D noise reduction
Video	You can choose to record normally and trigger motion detection/face detection/alarm input to record
Advertising	Support full-screen or half-screen image or video ads less than 1GB in size
Warning information and logo	The warning information supports warning pictures and warning voices, and the logo picture can set the size and position of the picture
Others	
VESA Mounting Pattern	200 × 200, location centered on monitor body
Operating Temperature	32°F to 104°F (0°C to 40°C)
Storage Temperature	-4°F to 140°F (-20°C to 60°C)
Operating Humidity	10 to 85°C
Certifications	CE, FCC certificates
Reset Button	On-board reset button
Installation method	Wall
Product Size	752.0 × 483.0 × 38.0 mm (29.61" × 19.02" × 1.5")
Net weight	9.2 KG
Gross Weight	11.7 KG

Dimensions

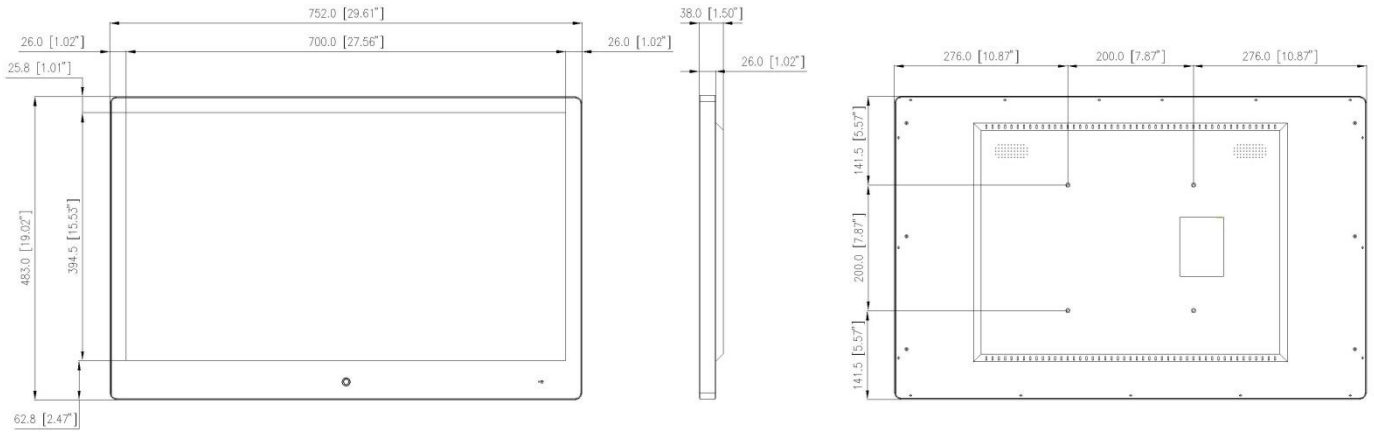

©2025 Sunell all rights reserved. Design and specifications are subject to change without notice.