

SN-AC1102A

Access Controller




Key Features

- 2-door access control
- TCP/IP network connectivity
- Card capacity: up to 42,000 users
- Event log capacity: up to 200,000 records
- Flexible Wiegand interface (W26, W34, W66 compatibility)

Specifications

Communication	
Wiegand	Wiegand 26 / 34 / 66
Wiegand Transmission Distance	Up to 100 m (328 ft), recommended ≤ 80 m (262 ft)
Network Protocol	TCP/IP
Ethernet Transmission Distance	Up to 100 m (328 ft), recommended ≤ 80 m (262 ft)
Storage	
Card Capacity	Up to 42,000 cards (expandable)
Event Log Capacity	Up to 200,000 records (expandable)
Interface	
Network Interface	1 × RJ-45, 10/100Base-T Ethernet, auto-negotiation
Door Control	2 doors
Card Reader Interface	4 × Wiegand
Exit Button Input	2
Door Sensor Input	2
Relay Output	2
General	
Power Supply	100–240 VAC
Output Voltage	12 VDC
Power Consumption	Standby ≤ 4.2 W; Operating ≤ 36 W
Operating Temperature	-20°C to 60°C (-4°F to 140 °F)
Operating Humidity	10–90% RH (non-condensing)
Operating Environment	Indoor
Dimensions	277 × 232 × 70 mm (10.91 × 9.13 × 2.76 in)
Net Weight	1.97 kg (4.34 lb)

Dimensions

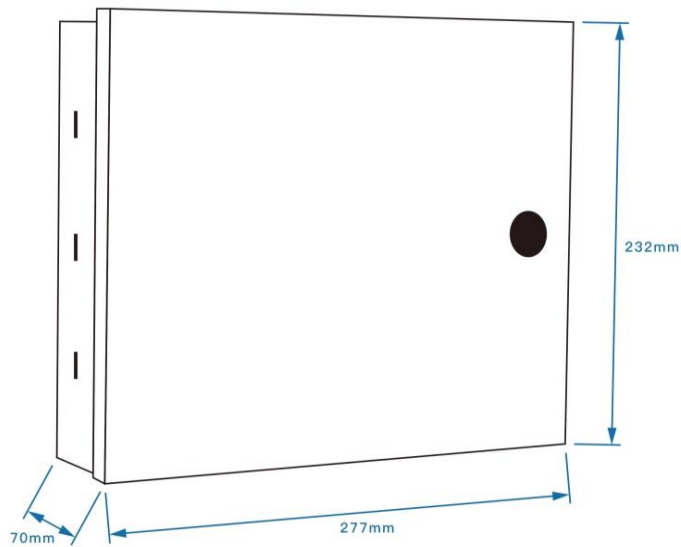

Application

