SN-CH0010

Housing



Key Features

- Flap design for easy installation and maintenance
- Rugged aluminum alloy housing with IP66 protection
- Built-in IR illuminator with up to 80 m range
- -40℃ to +60℃ operating range with built-in fan and heated window


Product specifications are subject to change without prior notice. For the latest Sunell product information, please visit www.sunellsecurity.com.
© 2026 Shenzhen Sunell Technology Corporation. All rights reserved.

Specifications

Parameters	
Compatible Products	SN-IPCXXXXWAN
Material	Aluminum Alloy
Color	White
Heater	Supported
Fan	Supported
Power Supply	100–240 VAC, 50/60 Hz, 1.7 A
Power Consumption	Max. 32 W
Operating Temperature	-40°C to +60°C (-40°F to +140°F)
Operating Humidity	0%–95% RH
Ingress Protection	IP66
Window Dimensions	83 × 70 mm (3.27 × 2.76 in)
Internal Dimensions	475.3 × 150.3 × 139.5 mm (18.72 × 5.92 × 5.49 in)
Dimensions	585 × 232.9 × 174.8 mm (23.03 × 9.17 × 6.88 in)
Net Weight	Approx. 6.60 kg (14.55 lb)
Illuminator	
Illuminator Type	IR
Wavelength	850 nm
Illumination Distance	Up to 80 m (262.47 ft)

Product specifications are subject to change without prior notice. For the latest Sunell product information, please visit www.sunellsecurity.com.
© 2026 Shenzhen Sunell Technology Corporation. All rights reserved.

Dimensions (mm)

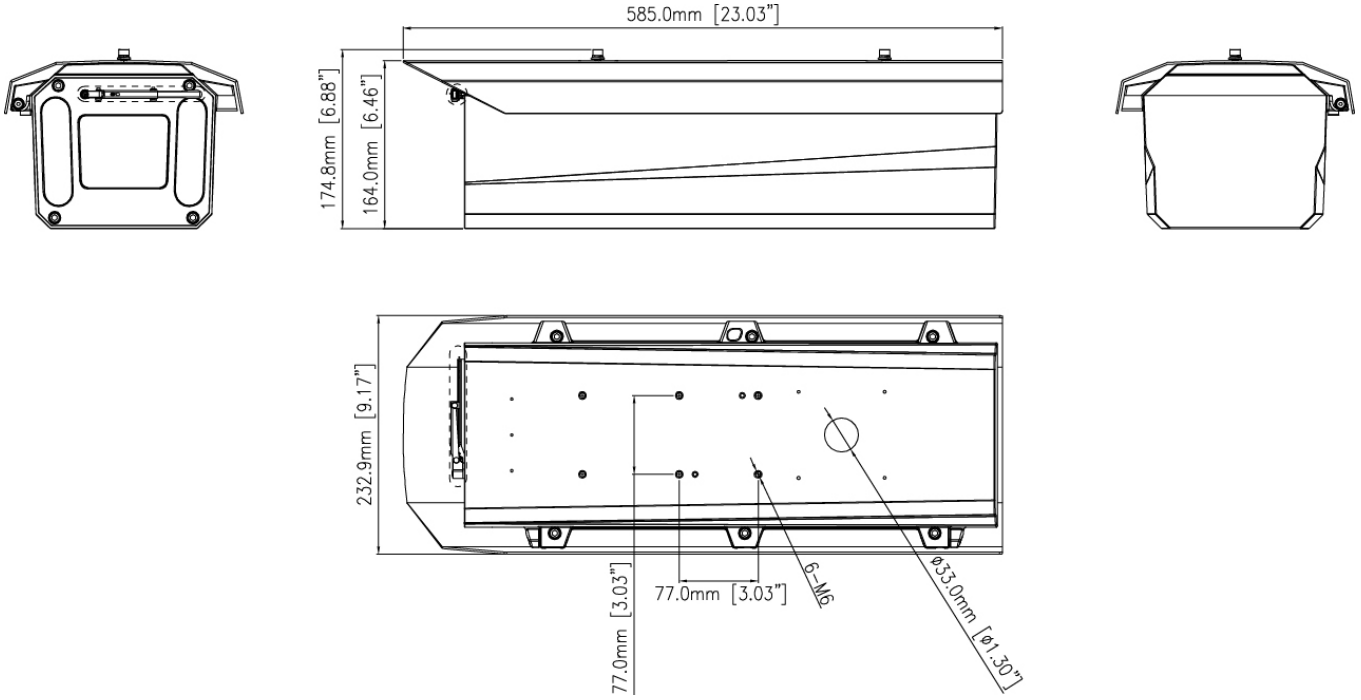

Accessories

Optional:




SN-CBK905

Universal Joint Bracket



SN-CBK508

Wall Mount Bracket



SN-CBK105

Pole Mount Bracket



SN-SMWR05S

Multi-Lane Traffic Speed Radar

Product specifications are subject to change without prior notice. For the latest Sunell product information, please visit www.sunellsecurity.com.
© 2026 Shenzhen Sunell Technology Corporation. All rights reserved.