

SN-CH515HF

Outdoor Housing




Key Features

- Aluminum alloy housing with IP66 protection
- Built-in heater and temperature-controlled fan
- IR illumination distance up to 80 m (262.5 ft)
- Optional 12 VDC or PoE++ (IEEE 802.3bt) power supply

Specifications

Parameters	
Compatible Cameras	SN-IPCXXXXHAN
Material	Aluminum alloy
Color	White
Heater	ON: 10°C ± 3°C (50°F ± 5.4°F); OFF: 20°C ± 3°C (68°F ± 5.4°F)
Fan	ON: 45°C ± 3°C (113°F ± 5.4°F); OFF: 30°C ± 3°C (86°F ± 5.4°F); operates simultaneously with the heater
Power Supply	Optional: 12 VDC or PoE++ (IEEE 802.3bt)
Power Consumption	Max. 36 W (IR, Fan, and Heater ON)
Operating Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Operating Humidity	0%–95% RH (Non-Condensing)
Ingress Protection	IP66
Window Dimensions	110 × 90 mm (Max. Lens Diameter: Φ63 mm)
Internal Dimensions	275 × 110 × 90 mm (10.83 × 4.33 × 3.54 in)
Dimensions	471.1 × 172.3 × 125.2 mm (18.55 × 6.78 × 4.93 in)
Net Weight	Approx. 2.4 kg (5.29 lb)
Illuminator	
Illuminator Type	IR
Wavelength	850 nm
Illumination Distance	≥80 m (262.5 ft)
Illuminator Control	Photocell (default) or Camera Control

Dimensions (mm)

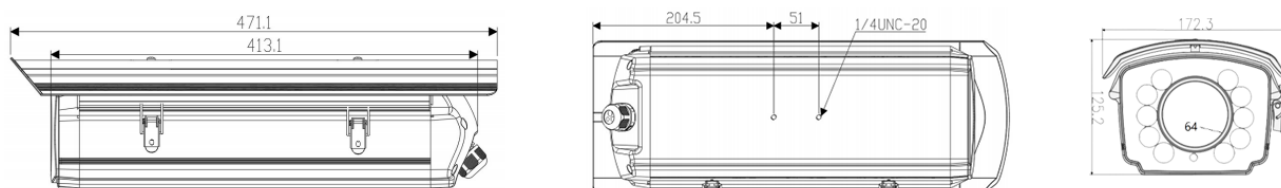

Accessories

Optional:



SN-BK385
Wall Mount