

# SN-GL3101

## Electromagnetic Lock




### Key Features

- Magnetic lock supports up to 280 kg (617 lb) of thrust
- Power supply can be 12 VDC or 24 VDC, (default 12 VDC)
- Suitable for wooden doors, glass doors and fire doors
- Mechanical life: Up to 500,000 operations
- High abrasion-resistant construction

## Specifications

General	
Power Supply	12/24 VDC $\pm$ 10%, 480 mA (12 VDC); 240 mA (24 VDC)
Operating Temperature	-10 °C ~ +55 °C (14 °F ~ 131 °F)
Operating Humidity	0–95% RH (non-condensing)
Material	Lock body & Armature plate: Eco-friendly zinc alloy with electroplated finish Shell: Hard anodized electroplated finish
Dimensions	Lock body: 250 × 48 × 28 mm (9.84 × 1.89 × 1.10 in) Armature plate: 180 × 38 × 11 mm (7.09 × 1.50 × 0.43 in)
Net Weight	2.0 kg (4.41 lb)
LED Indicator	Red: Unlocked; Green: Locked
Mechanical Life	Up to 500,000 operating cycles
Holding Force	Up to 280 kg (617 lb)
Suitable Door Types	Wooden, glass, and fire-rated doors

## Dimensions

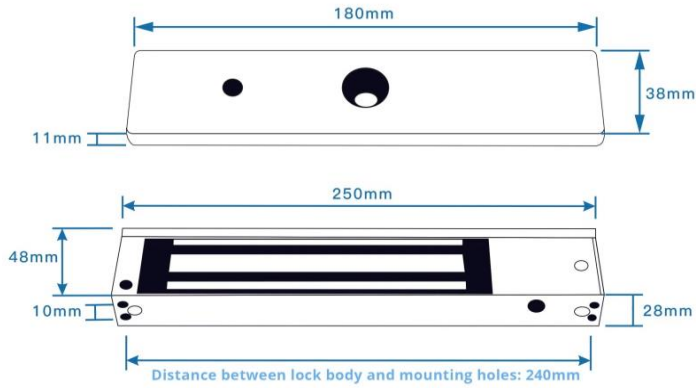

## Application

