# SN-NVR3932E8-JA

32CH 2U 8HDD 4K NVR



## Key Features

- Up to 32-ch IP cameras access
- Up to 320 Mbps incoming/outgoing bandwidth
- Up to 4-ch@12MP/8-ch@8MP/16-ch@4MP/32-ch@1080P decoding capacity
- Supports face comparison and target search
- Supports some specialist cameras, including people counting camera, ANPR camera, fisheye camera, panoramic camera and thermal camera
- Support fisheye Dewarping and VCA alarm linkage
- Up to 4-ch perimeter protection
- Support 2 HDMI and 1 VGA interface
- Support RAID 0/1/5/6/10, and N+1 failover

Product specifications are subject to change without prior notice. For the latest Sunell product information, please visit www.sunellsecurity.com.
© 2026 Shenzhen Sunell Technology Corporation. All rights reserved.

## Specifications


| | |
|---|---|
| **Video & Audio** | |
| IP Camera Input | 32 Channel |
| HDMI Output | HDMI 1: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1024 × 768<br>HDMI 2: 1920 × 1080, 1280 × 1024, 1024 × 768 |
| VGA Output | 1920 × 1080, 1280 × 1024, 1024 × 768 |
| Different Source Output | Supported |
| Multi-screen Display | Default Mode (Mirrored): 1/4/8/9/16/32/36<br>Auxiliary Screen Mode:<br>- Main Screen: 1/4/8/9/16<br>- Auxiliary Screen: 1/4/8/9/16 |
| Decoding Capacity | 4ch @ 12MP, 8ch @ 8MP, 16ch @ 4MP, 32ch @ 1080P |
| **IVS** | |
| Intelligent Analysis (By NVR) | - Supports face comparison and image-based search<br>- Supports human and vehicle attribute search<br>- Up to 4-ch intrusion detection with human/vehicle target filtering |
| Intelligent Analysis (By Camera) | Intrusion, smart motion, single line crossing, double line crossing, object left, object removed, signal bad loitering, multi-loitering, abnormal speed, wrong way, illegal parking, people counting, fence, enter area, leave area, smoking detection, smoke and flame detection, fire spot detection, etc. |
| Trigger Event Actions | Buzzer, Push message to APP, Full screen, Email, FTP, PTZ, Speaker, Alarm out, Camera alarm out, Event recording |
| Smart Search | Supported |
| **Recording** | |
| Recording Resolution | 12MP, 8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc. |
| Recording Mode | Manual, Schedule (Regular, Continuous), Event |
| Dual Stream | Supported |
| Audio Compression | G.711A, G.711U, PCM |
| **Playback & Backup** | |
| Synchronous Playback | 16/9/4/1 |
| Search Mode | Time /Date, Alarm, Picture grid, Event |
| Playback Control | Play, pause, FF/REW, slow, digital zoom |
| Backup Mode | USB Device, Network, eSATA, NAS |
| **Event** | |
| General Event | Motion Detection, Video Loss, Alarm in, Abnormal alarm, Alarm out |
| Abnormal Alarm | Disk Alarm, IP Address Conflict, Network Disconnect, Failover alarm |
| Event Actions | Buzzer, Push message to APP, Full screen, Email, FTP, PTZ, Alarm output, Recording |

Product specifications are subject to change without prior notice. For the latest Sunell product information, please visit www.sunellsecurity.com.
© 2026 Shenzhen Sunell Technology Corporation. All rights reserved.


| Network | |
|---|---|
| Incoming Bandwidth | 320 Mbps |
| Outgoing Bandwidth | 320 Mbps |
| Protocols | HTTP, HTTPS, TCP/IP, IPv4, IPv6, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, FTP, P2P, IP Address Filtering, DDNS, IEEE 802.1X, SNMP, 3G/4G, PPPoE |
| Remote Users | Up to 8 users |
| P2P | P2P, Web NAT |
| Interoperability | ONVIF, SDK, CGI |
| Security | IP Address Filtering, User Access Log, IEEE 802.1X, TLS, Signed Firmware |
| **Storage** | |
| HDD | 8 SATA interfaces |
| Capacity | Up to 16 TB per disk |
| ANR | Supported |
| Disk Group | Supported |
| RAID | RAID 0, RAID 1, RAID 5, RAID 6, RAID 10 |
| **Interface** | |
| Network Interface | 2 × RJ-45, 10/100/1000 Mbps self-adaptive Ethernet ports |
| eSATA | 1 eSATA Interface |
| HDMI | 2 |
| VGA | 1 |
| Audio Interface | 1 input, 1 output |
| Alarm Interface | 16 inputs, 6 outputs |
| USB Interface | Front panel: 2 × USB 2.0; Rear panel: 2 × USB 3.0 |
| RS-232 | 1 |
| RS-485 | 1 |
| Reset Button | On-board reset button |
| **General** | |
| Power Supply | 100 to 240VAC |
| Power Consumption | < 15 W (without HDD) |
| Operating Temperature | -10 °C to 50 °C (14 °F to 122 °F) |
| Operating Humidity | ≤ 90% RH (Non-condensing) |
| Certifications | CE/FCC |
| Dimensions | 440 × 426 × 111.5 mm (17.32 × 16.77 × 4.39 inch) |
| Net Weight | 7.3kg (16.09lb) without HDD |

Product specifications are subject to change without prior notice. For the latest Sunell product information, please visit www.sunellsecurity.com.
© 2026 Shenzhen Sunell Technology Corporation. All rights reserved.

## Dimensions (mm)

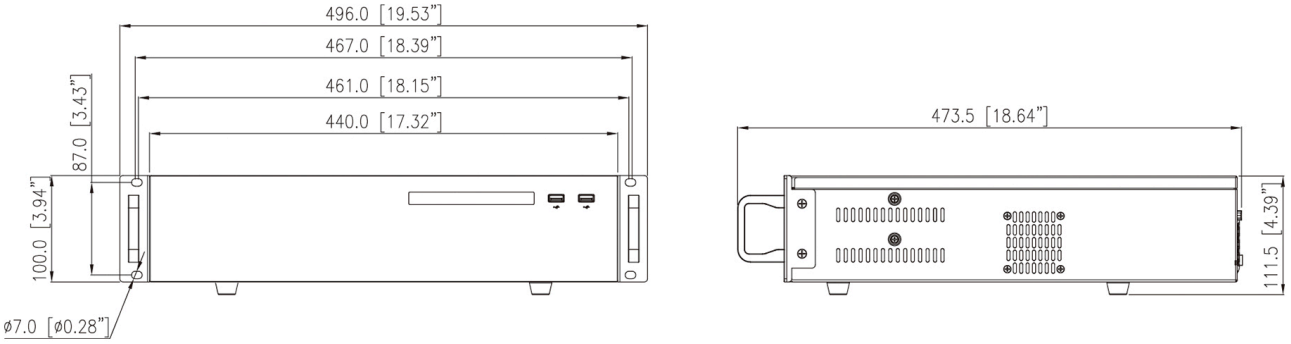


## Rear Panel

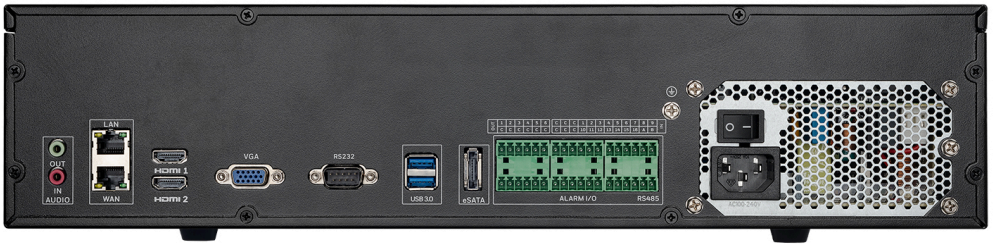


Product specifications are subject to change without prior notice. For the latest Sunell product information, please visit www.sunellsecurity.com.
© 2026 Shenzhen Sunell Technology Corporation. All rights reserved.