

SN-CH515HF-R

Outdoor Housing




Specification

Parameters	
Application Model	SN-IPCXXXXHAN
Color	White
Fan	On: $45^{\circ}\text{C} \pm 3^{\circ}\text{C}$ ($113^{\circ}\text{F} \pm 37.4^{\circ}\text{F}$), Off: $30^{\circ}\text{C} \pm 3^{\circ}\text{C}$ ($86^{\circ}\text{F} \pm 37.4^{\circ}\text{F}$) When the heater is turned on, the fan turns on simultaneously
Heater	On: 10°C ± 3°C (50°F ± 37.4°F), Off: 20°C ± 3°C (68°F ± 37.4°F)
Illumination Type	IR
Wavelength	850 nm
Illumination Distance	≥ 80 m
Illumination Setting (Automatic Control)	1 to 3 Lux on, 2 to 6 Lux off
IR Control	Photosensitive automatic control (default) / Camera control Two optional options
Power Supply	DC12V or PoE++ (802.3bt) optional
Power	Max. 36W (IR + fan + heater on)
Working Temperature	-25°C to 60°C (-13°F to 140°F)
Operating Humidity	0% to 95% RH
Ingress Protection	IP66
Window Size	$110 \times 90 \text{ mm}$ (max. support for lenses with an outer diameter of less than 63mm)
Internal Installation Space (L × W × H)	275 × 110 × 90 mm (10.83 × 4.33 × 3.54 inch)
Product Dimensions (L \times W \times H)	471.1 × 172.3 × 125.2 mm (18.55 × 6.78 × 4.93 inch)
Product Weight	About 2.4 kg (5.29 lb)



Dimensions (mm)

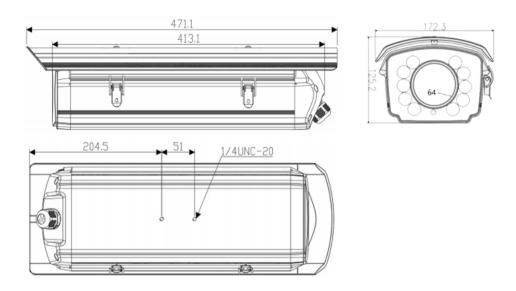

Accessories

Optional:



SN-BK385 Wall Mount